




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>G09G 3/28</b>		<b>A1</b>	(11) International Publication Number: <b>WO 00/17845</b>
			(43) International Publication Date: 30 March 2000 (30.03.00)
(21) International Application Number: PCT/JP99/05006 (22) International Filing Date: 14 September 1999 (14.09.99) (30) Priority Data: 10/264616      18 September 1998 (18.09.98)      JP 11/125817      6 May 1999 (06.05.99)      JP (71) Applicant (for all designated States except US): MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP). (72) Inventors; and (75) Inventors/Applicants (for US only): MORITA, Tomoko [JP/JP]; 1-8-10-603, Deguchi, Hirakata-shi, Osaka 573-0065 (JP). ISHIKAWA, Yuichi [JP/JP]; 2-32-1-301, Tamakushi, Ibaraki-shi, Osaka 567-0895 (JP). KASAHARA, Mitsuhiro [JP/JP]; 3-17-3, Nagaonishimachi, Hirakata-shi, Osaka 573-0162 (JP). (74) Agents: AOYAMA, Tamotsu et al.; Aoyama & Partners, IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540-0001 (JP).			(81) Designated States: CN, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: COLOUR DISPLAY APPARATUS

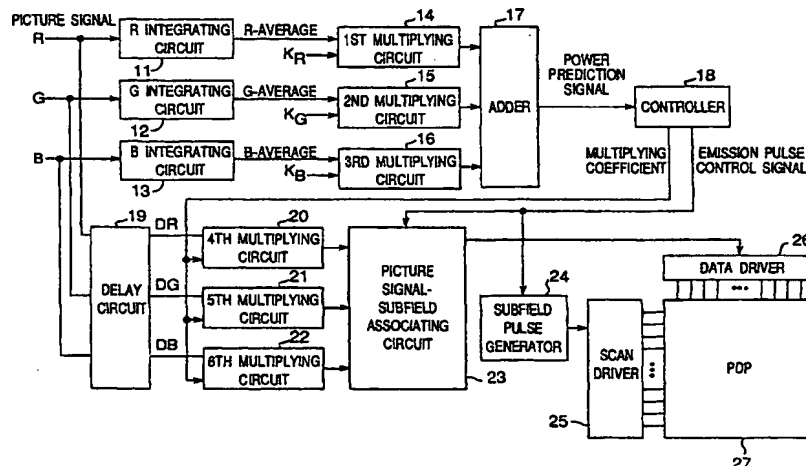

## (57) Abstract

This invention provides a display apparatus having high accuracy to control automatically power consumed for display operation suitable for emission-type display apparatus like a plasma display apparatus, electroluminescence display apparatus and a light emission diode display apparatus. The display apparatus comprises an emission unit (27), integrating circuits (11, 12, 13) for integrating input picture signals of R, G and B for each predetermined period to output average levels of R signal, G signal and B signal, respectively, multiplying circuits (14, 15, 16) for multiplying those average levels by their respective parameters  $K_R$ ,  $K_G$  and  $K_B$ , respectively, an adder (17) for obtaining a signal indicating expected consumption power on the emission unit by adding output signals from the multiplying circuits, a controller (18) for receiving the power prediction signal to output a control signal based on the received signal, and a brightness control circuit for controlling light emission amount per unit area according to the control signal.

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	EK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## COLOUR DISPLAY APPARATUS

### 5 TECHNICAL FIELD

The present invention relates to display apparatuses such as plasma displays, electroluminescence displays, and light emitting diode displays.

### 10 BACKGROUND ART

Conventionally, a light-emitting type display apparatus such as a plasma display, an electroluminescence display or a light emitting diode display generally emits light to display when it has some  
15 amount of information that should be displayed. The display apparatus inevitably involves large power consumption as the amount of information to be displayed becomes large. Therefore, it has been studied to restrict power consumption when the amount of display data has  
20 become large. In Japanese Patent Laid-Open Publication No. H08-65607, it is disclosed that depending on average luminance signal level of images, an automatic power control (APC) section adjusts the light emission amount per unit area (luminance) of a display in response to variations  
25 in the average luminance signal level so that the power

consumption is controlled so as not to increase excessively.

Fig. 11 is a block diagram showing the configuration of the display apparatus according to the prior art disclosed in the publication. R, G and B signals as picture signals are fed into their corresponding terminals. The R, G and B signals via their corresponding terminals are fed into a Y-encode circuit 61 which encodes the R, G and B signals into a luminance signal (hereinafter, referred to as Y signal) to output. A digital luminance integrating circuit 62 inputs and integrates the Y signal from the Y-encode circuit 61 to output an average luminance.

Taking as a parameter the average luminance outputted from the digital luminance integrating circuit 62, a memory controller 63 receives data corresponding to the average luminance from a memory 64 to output the data to an automatic power controller 66 of a plasma display apparatus 68. The automatic power controller 66 outputs to a PDP (plasma display panel) display section 67 a control signal for adjusting the light emission amount per unit area (luminance) of the PDP display section 67 in response to the data from the memory control section 63, thereby power consumption is controlled.

However, the power consumption at the PDP display section 67 is not proportional to the luminance signal. For example, with a common transform equation, Y

=  $0.3R + 0.59G + 0.11B$ , used in the Y-encode circuit 61, the ratio among their respective luminance signals (YR, a luminance signal for display of single red; YG, a luminance signal for display of single green; and YB, a luminance signal for display of single blue) is  $YR : YG : YB = 0.3 : 0.59 : 0.11$  when single color of red (hereinafter, expressed as R), green (hereinafter, expressed as G) and blue (hereinafter, expressed as B) are displayed. Here, the luminance signal YG for the display of G is the largest and the luminance signal YB for the display of B is the smallest so that different control processes are performed by the automatic power controller 66 for the respective cases of the display of the single color depending on the average luminance. Ratio among respective coefficients (0.3, 0.59, 0.11) for obtaining luminance signals in the transform equation equals to a ratio at which human eyes feel the brightness with each three primary colors (R, G, B), and do not show any power consumption ratio. Therefore, it may cause inappropriate control to be performed.

As shown above, in the technique of the prior art, with average luminance used as a parameter for the power consumption control of a display apparatus, light emission amount (luminance) of the display section 67 would be recognized as less than required amount in the case of an image in which green components occupy a larger portion

than the other colors, and power consumption would be recognized as more than the performance of the power supply 65 in the case of an image in which blue components occupy a larger portion than the other colors. Thus, it has  
5 been a problem of the prior art technique that an accurate automatic control of power consumption or light emission amount cannot be achieved.

#### DISCLOSURE OF THE INVENTION

10 In order to solve the above problem, a display apparatus of the present invention is characterized in that the light emission amount (luminance) or power consumption is controlled based on a power prediction signal obtained by weighted average levels of individual  
15 colors with coefficients representing ratios of power consumptions involved in data display when the three primary colors of red, green and blue are displayed in single colors, respectively, or representing ratios of phosphor areas of the individual colors, and by then  
20 summing up the weighted average levels.

According to the present invention, since the power consumption or light emission amount (luminance) is controlled based on a power prediction signal computed with coefficients representing power consumption ratios or  
25 phosphor area ratios, it becomes possible to control the

power consumption or light emission amount (luminance) independently of the hue of input picture signals.

In a first aspect of the invention, a display apparatus comprises an emission unit, integrating circuits, three multiplying circuits, a power consumption prediction  
5 circuit, a controller and a brightness control circuit.

The emission unit emits light to display images. The integrating circuits integrate input picture signals of R (red), G (green) and B (blue) for each predetermined period  
10 to output an average level of R signal, an average level of G signal and an average level of B signal, respectively. The first, second and third multiplying circuits multiplies the R average level, the G average level and the B average level by their respective parameters  $K_R$ ,  $K_G$  and  $K_B$ ,  
15 respectively. The power prediction circuit adds output signals from those multiplying circuits together to obtain and output a power prediction signal. The signal indicates amount of power predicted or expected to be consumed on the emission unit. The controller receives the power  
20 prediction signal to output a control signal based on a value of the received signal. The brightness control circuit controls light emission amount per unit area according to the control signal.

In the display apparatus, a ratio of parameters  
25  $K_R$ ,  $K_G$  and  $K_B$  may be determined to be equal to a ratio of

powers consumed for display each color of red, green and blue with same brightness. In this case, the display apparatus can control the power consumption or light emission amount (luminance) more accurately, as compared  
5 with the prior art technique in which power consumption of the display apparatus is controlled with average luminance.

In a second aspect of the invention, a display apparatus comprises an emission unit, integrating circuits, first, second and third multiplying circuits, a power  
10 consumption prediction circuit, a controller, a delay circuit and a first, second and third multiplying circuits.

The emission unit emits light to display images. The integrating circuits integrates input picture signals of R, G and B for each predetermined period to output an  
15 average level of R signal, an average level of G signal and an average level of B signal, respectively. The first, second and third multiplying circuits multiplies the R average level, the G average level and the B average level by their respective parameters  $K_R$ ,  $K_G$  and  $K_B$ , respectively.  
20 The ratio of parameters  $K_R$ ,  $K_G$  and  $K_B$  is determined to be equal to a ratio of powers consumed for display each color of red, green and blue with same brightness. The power consumption prediction circuit adds output signals from the multiplying circuits together to obtain and output a power  
25 prediction signal. The signal indicates amount of power



expected to be consumed on the emission unit. The controller receives the power prediction signal to output a multiplying coefficient based on a value of the received signal. The delay circuit delays the input picture signals of R, G and B to output the delayed picture signals DR, DG and DB, respectively. The fourth, fifth and sixth multiplying circuits multiplies the delayed picture signals DR, DG and DB by the multiplying coefficient, respectively.

In a third aspect of the invention, a display apparatus for dividing one field of picture signal into a plurality of subfields weighted respectively, and then displaying images of subfields in superimposition on time region to realize gradation expression.

The display apparatus comprises an emission unit, R, G and B integrating circuits, multiplying circuits, a power consumption prediction circuit, a controller, a delay circuit, picture signal - subfield associating circuit, a subfield pulse generator.

The emission unit emits light to display images. The R integrating circuit, G integrating circuit and B integrating circuit integrates at least one field of input picture signals of R, G and B to output an average level of R signal, an average level of G signal and an average level of B signal, respectively. The multiplying circuits multiplies the R average level signal, the G average level signal and

the B average level signal by parameters KR, KG and KB determined based on the ratio of powers consumed for display each color of red, green and blue. The power consumption prediction circuit adds output signals from the first, second and third multiplying circuits together to obtain and output a power prediction signal. The signal indicates power expected to be consumed on the emission unit. The controller receives the power prediction signal to output a emission pulse control signal for selecting one of light emission types in response to a value of the received signal. The delay circuit for delaying the input picture signals R, G and B to output the delayed picture signals DR, DG and DB, respectively. The picture signal - subfield associating circuit receives the emission pulse control signal and the delayed picture signals DR, DG and DB, and associates output signals from the delay circuit with subfield structure of the light emission type based on the emission pulse control signal. The subfield pulse generator receives the emission pulse control signal, and generates pulses in the subfield structure corresponding to the light emission type based on the emission pulse control signal. The pulses include at least one of scanning pulses, sustaining pulses and erasing pulses.

In a forth aspect of the invention, a display apparatus for displaying images of subfields in

superimposition on time region to display data with gradation, by dividing one field of picture signal into a plurality of subfields weighted.

The display apparatus comprises an emission unit,  
5 R, G and B integrating circuits, first, second and third multiplying circuits, a power consumption prediction circuit, a controller, a delay circuit, forth, fifth and sixth multiplying circuits, a picture signal - subfield associating circuit, a subfield pulse generator.

10 The emission unit emits light to display images. The R integrating circuit, G integrating circuit and B integrating circuit integrates at least one field of input picture signals of R, G and B to output an R average level signal, a G average level signal and a B average level  
15 signal, respectively. The multiplying circuits multiplies the R average level signal, the G average level signal and the B average level signal by respective parameters  $K_R$ ,  $K_G$  and  $K_B$  obtained by a ratio of powers consumed for display each color of red, green or blue. The power consumption  
20 prediction circuit adds output signals from the multiplying circuits together to obtain and output a power prediction signal. The signal indicates power expected to be consumed on the emission unit. The controller receives the power prediction signal to output a emission pulse control  
25 signal and a multiplying coefficient according to a value of

the received signal. The emission pulse control signal is available for selecting one of light emission types, the multiplying coefficient is available for equalizing gray scale level at a border of adjacent emission types. The multiplying coefficient is obtained based on the power prediction signal from the controller. The delay circuit delays the input picture signals of R, G and B to output delayed picture signals DR, DG and DB, respectively. The fourth, fifth and sixth multiplying circuits multiplies the delayed picture signals DR, DG and DB by a multiplying coefficient for collecting gray scale level so as to equalize gray scale level between adjacent emission types at changeover point of those emission types, respectively. The picture signal - subfield associating circuit receives the emission pulse control signal and the signals of the fourth, fifth and sixth multiplying circuits as inputs, and associates the received signals from the fourth, fifth and sixth multiplying circuits with subfield structure of a light emission type responsive to the emission pulse control signal. The subfield pulse generator receives the emission pulse control signal, and generates pulses including scanning, sustaining, erasing pulses with the subfield structure of a light emission type responsive to the emission pulse control signal.

In the display apparatus described above, a ratio

of the parameters  $K_R$ ,  $K_G$  and  $K_B$  may be equal to a ratio of area of phosphors for each color of red, green and blue. Since the areas of the phosphors are generally proportional to the power consumption, the power prediction signal can be estimated in a simplified manner by weighting the individual color average levels with coefficients representing the area ratios of the phosphors and then summing up the weighted average levels.

## 10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the configuration of a display apparatus of a preferred embodiment of the present invention.

15 Fig. 2 is a view showing light emission types of the display apparatus.

Fig. 3 is a view showing a relation between the power prediction signal and the actual consumption power when gradation correction is not performed by the multiplying coefficient.

20 Fig. 4 is a view explaining operation for selection of light emission type by the controller.

Fig. 5 is a view showing a relation between the power prediction signal and the multiplying coefficient in the display apparatus.

25 Fig. 6 is a view showing a relation between the

power prediction signal and the actual consumption power when gradation correction is performed by the multiplying coefficient (first multiplying coefficient).

Fig. 7 is a view showing a relation between the power prediction signal and the another multiplying coefficient (second multiplying coefficient).

Fig. 8 is a view showing a relation between the power prediction signal and the actual consumption power when gradation correction is performed by the second multiplying coefficient.

Fig. 9 is a view showing a control characteristic between the power prediction signal of the display apparatus and the light emission amount per unit area (luminance) of the display apparatus.

Figs. 10A and 10B are views showing the arrangement of phosphors of a plasma display panel which is an embodiment of the present invention; and

Fig. 11 is a block diagram showing the configuration of a display apparatus according to the prior art.

## BEST MODE FOR CARRYING OUT THE INVENTION

Referring to accompanied drawings, preferred embodiments of the present invention are described.

(Embodiment 1)

Fig. 1 is a block diagram showing an embodiment of the display apparatus according to the present invention. The display apparatus includes R G and B integrating circuits 11, 12 and 13, first, second and third multiplying circuits 14, 15 and 16, an adder 17, a controller 18, a delay circuit 19, fourth, fifth and sixth multiplying circuits 20, 21 and 22, a picture signal-subfield associating circuit 23, a subfield pulse generator 24, a scan driver 25, a data driver 26 and a PDP (Plasma Display Panel) 27.

The R integrating circuit 11, the G integrating circuit 12 and the B integrating circuit 13 receive an R signal, a G signal and a B signal as their input picture signals, respectively, and produce output values as an R average level, a G average level and a B average level resulting from integrating those signals of a specific period, for example at least one field, and then dividing integration results by the number of integration pixels.

R average level, G average level and B average level, are inputted to a first multiplying circuit 14, a second multiplying circuit 15 and a third multiplying circuit 16, respectively, where the average levels are multiplied by individual coefficients,  $K_R$ ,  $K_G$  and  $K_B$ , respectively, and the results are outputted to the adder 17. The coefficients  $K_R$ ,  $K_G$  and  $K_B$  are defined such that ratio of those coefficients is equal to ratio of consumed power among R,

G and B colors required for displaying data with a single color respectively. That is, picture signals with same conditions are inputted for R, G and B signal, respectively, without operation of the controller 18, and consumed power  
5 required for displaying data in the PDP 27 with respective color is measured. Then, the ratio of coefficients  $K_R$ ,  $K_G$  and  $K_B$  are set to the ratio of those measured powers for each color.

For example, the coefficients  $K_R$ ,  $K_G$  and  $K_B$  may  
10 be determined to have a ratio such as  $K_R:K_G:K_B=PR:PG:PB$ , where  $PR$  is consumed power required for displaying an image with a single color of red,  $PG$  is consumed power required for displaying the image with a single color of green,  $PB$  is consumed power required for displaying the  
15 image with a single color of blue in the PDP 27.

The first multiplying circuit 14 multiplies the R average level by the coefficient  $K_R$ , the second multiplying circuit 15 multiplies the G average level by the coefficient  $K_G$ , and the third multiplying circuit 16 multiplies the B  
20 average level by the coefficient  $K_B$ . The adder 17 adds up output signals from the first multiplying circuit 14, the second multiplying circuit 15 and the third multiplying circuit 16 to obtain and output a power prediction signal which indicates amount of power expected to be consumed  
25 on the PDP 27. The controller 18 inputs the power



prediction signal, selects one of light emission types to adjust the light emission amount per unit area (luminance) of the display apparatus so as to limit power consumption, and outputs emission pulse control signal corresponding to the selected light emission type. Simultaneously, the controller 18 also outputs a multiplying coefficient by which the light emission amount (luminance) of an image does not differ at bounds of light emission types. The operation of the controller 18 is described in detail below.

10           The delay circuit 19 inputs the input picture signals R, G and B, produces picture signals DR, DG and DB which are delayed by a total time required at the individual sections of the integrating circuits 11, 12 and 13, the multiplying circuits 14 to 16, the adder 17 and the controller 18 to output. The forth, fifth and sixth multiplying circuits 20, 21 and 22 input the delayed picture signals DR, DG and DB, respectively, and multiply the delayed picture signals DR, DG and DB by the multiplying coefficient from the controller 18 to output.

20           The picture signal-subfield associating circuit 23 inputs signals from the fourth, fifth and sixth multiplying circuits 20, 21 and 22 as well as the emission pulse control signal. The picture signal-subfield associating circuit 23 converts the signals from the fourth, fifth and sixth multiplying circuits 20, 21 and 22 expressed in powers of 2

25

into light-emission patterns of subfields of the light emission type corresponding to the emission pulse control signal and then transmits data of the first subfield, data of the second subfield, ..., and the data of the n-th subfield of each pixel in sequence during a one-field period at specified timing (where n is the number of subfields). It is noted that several operations, such as operation for changing the number of subfields to suppress the pseudo-contour noise, may be performed in the picture signal-subfield associating circuit 23.

The subfield pulse generator 24 inputs the emission pulse control signal, and supplies a scanning, sustaining and erasing signals with subfield structure of the light emission type corresponding to the emission pulse control signal to the scan driver 25. The scan driver 25 supplies scanning, sustaining and erasing signals to row electrodes of a PDP 27 at specified voltage level.

The data driver 26 inputs the output signal of the picture signal-subfield associating circuit 23, generates image data pulses, each of which has voltage corresponding to individual pixel data, and divides these pulses by columns to supply them to column electrodes of PDP 27 in synchronism with signals outputted from the scan driver 25. Thus PDP 27 is driven to display images according to the input picture signals.

In this preferred embodiment, when consumed power to display increases according to increase of amount of information to be displayed by change of input picture signal, light emission amount and brightness in the apparatus are controlled to limit consumed power within predetermined range. Specifically, light emission type (emission period and number of emission) and gradation of the brightness in the display apparatus is controlled such that consumed power to display does not become larger than a predetermined value P. For this purpose, the display apparatus expects the consumed power based on the input picture signals, and then controls the emission type (emission period and number of times of emission) and gradation (or gray scale) based on the expected consumed power such that the consumed power is limited to be in a predetermined range.

In more detail, the controller 18 selects a light emission type in response to the power prediction signal and outputs an emission pulse control signal for controlling the light emission type (emission time duration or number of times of emission), as well as multiplying coefficients for adjustment of the gray scale level (or gradation level) of an input picture signal so that the light emission amount or luminance transits smoothly in the display apparatus between adjacent light emission types.

The determination of the light emission type and the multiplying coefficients in the controller 18 is described below.

The emission type is firstly explained. As shown in Fig. 2, the display apparatus of this embodiment has five emission types including emission type A, emission type B, emission type C, emission type D and emission type E, which decrease in the total number of times of light emission as 1275, 1020, 765, 510 and 255, respectively, as the power prediction signal increases in value.

On the basis of 8-bit gray scale levels ranging from 0 to 255, the number of emission pulses is so set that the number of times of light emission is fivefold larger than the gray scale levels in the emission type A, fourfold larger than the gray scale levels in the emission type B, and likewise threefold, twofold and one-fold larger than the gray scale levels in the emission type C, emission type D and emission type E, respectively.

These emission types are changed over based on the power prediction signal. The value (changeover point) of the power prediction signal which causes changeover of the emission type is described below. Fig. 3 explains the determination of changeover points of the light emission type. The figure shows the relation between the power prediction signal and the consumed power for display. As

shown in this figure, the emission type A and the emission type B are changed over at the predetermined value TB. The emission type B and the emission type C are changed over at the predetermined value TC. The emission type C and the emission type D are changed over at the predetermined value TD. The emission type D and the emission type E are changed over at the predetermined value TE. The value TE, for example, is obtained as follows. The consumed power is measured according to the vary of the input picture signal which varies to reduce the power prediction signal gradually from the maximum value of the signal. It is noted that the power prediction signal is obtained under the condition that the multiplying coefficient is 1. The consumed power decreases according to the decrease of the power prediction signal. The changeover point TE is determined at the point where the consumed power is equal to the predetermined value P.

The consumed power becomes  $2P$  for the light emission with the power prediction signal which is TE and the emission type which is D, because the number of times of emission type D is two times of that of emission type E. While the power prediction signal is decreased gradually from this point TE as a start point, the value at which the consumed power reaches P is obtained as the power prediction\_signal value TD. The exchange points TC and

TB are determined respectively in like manner.

Fig. 4 is a flowchart of showing the operation of the controller 18 which determines the emission type based on the power prediction signal. As shown in Fig. 4, firstly, the power prediction signal is compared to the predetermined value TB (S1). When the signal is smaller than the value TB, the emission type A is selected (S6). When the signal is not smaller than the value TB, the signal is compared to the predetermined value TC (S2). When the signal is smaller than the value TC, the emission type B is selected (S7). When the signal is not smaller than the value TC, the signal is compared to the predetermined value TD (S3). When the signal is smaller than the value TD, the emission type C is selected (S8). When the signal is not smaller than the value TD, the signal is compared to the predetermined value TE (S4). When the signal is smaller than the value TE, the emission type D is selected (S9). When the signal is not smaller than the value TE, the emission type E is selected (S5).

When only changeovers among emission types having different numbers of times of light emission are performed on signals of the same gray scale level, the difference in number of times of light emission is detected as a luminance difference in the display apparatus at a changeover of emission type. Thus it needs to adjust the

gray scale level of an input picture signal. Furthermore, as shown in Fig. 3, the consumed power for displaying data is greatly over the value P. Therefore, the controller 18 outputs the multiplying coefficients varying in response to the power prediction signal, and then the gray scale level to be actually displayed is corrected by multiplying the input picture signals by the multiplying coefficients.

For example, when the power prediction signal is changed so that the emission type is changed over from emission type A to B, the following relation for same gray scale level is obtained as follows;

(luminance in emission type A) : (luminance in emission type B) = (number of times of emission in emission type A) : (number of times of emission in emission type B) = 5 : 4.

Therefore, the multiplying coefficient in the emission type A is so set as to be 1 for a small value of the power prediction signal. It is also so set as to monotonously decrease with increasing the power prediction signal, and be  $4/5 = 0.8$  at a region adjacent to the region of the emission type B. For example, when the gray scale level of the input picture signal is 200, at the border between type A and type B, the gray scale level by the emission type A adjacent to the region of the emission type B is  $(200 \times 0.8)$ , which results in a number of times of light emission,  $(200 \times$

0.8)  $\times 5 = 800$ , while the number of times of light emission in the emission type B adjacent to the emission type A is  $200 \times 4 = 800$ . Thus, the luminance in a display section 22 can be made equal between the two emission types.

5                   As to the changes in the other emission types as well, with the same concept, the multiplying coefficients are so set as to be from 1 to 0.75 (3/4) in the emission type B, 1 to 0.67 (2/3) in the emission type C, and the like as the power prediction signal increases in value. By determining  
10 the multiplying coefficients like this, it is possible to control gray scale level in display apparatus to allow luminance difference not to be detected even though the emission type is changed over.

For example, when  $TB = 0.2$ ,  $TC = 0.4$ ,  $TD = 0.6$   
15 and  $TE = 0.8$ , the power prediction signal value  $x$  and the multiplying coefficient  $y$  are obtained as follows;

$$\text{emission type A: } y = -x + 1 \quad (x < 0.2) \quad (1)$$

$$\text{emission type B: } y = -5/4x + 5/4 \quad (0.2 \leq x < 0.4) \quad (2)$$

$$\text{emission type C: } y = -5/3x + 5/3 \quad (0.4 \leq x < 0.6) \quad (3)$$

$$20 \quad \text{emission type D: } y = -5/2x + 5/2 \quad (0.6 \leq x < 0.8) \quad (4)$$

$$\text{emission type E: } y = ax + (1 - 0.8a) \quad (0.8 \leq x) \quad (5).$$

When  $x \geq 0.8$ , that is, emission type is E, the multiplying coefficient  $y$  is 1.0 with  $x = 0.8$ . The constant "a" is set not to be larger than zero so that the multiplying coefficient  $y$   
25 decreases as the power prediction signal  $x$  increases, and



to be any value which limits the consumed power to the predetermined value P. For example, when  $x=0.15$  and the emission type A is selected, the multiplying coefficient is calculated as follows;

5            $y=-x+1=-0.15+1=0.85.$

Fig. 5 shows the change of the multiplying coefficient to the power prediction signal by calculating the multiplying coefficient in a manner as described above.

When the multiplying coefficient is obtained  
10 based on the power prediction signal in a manner as described above in the controller 18, the change of the consumed power to the power prediction signal has a characteristic as shown in Fig. 6 instead of one as shown in Fig. 3. Therefore, not depending on the input picture signal,  
15 the consumed power for data display is limited not so as to be over the predetermined value P.

The multiplying coefficient may be changed curvilinearly in a predetermined interval as shown in Fig. 7, while it is changed linearly as shown in Fig. 5. This can  
20 improve the characteristic of the consumed power, where the consumed power is further limited to the value P as shown in Fig. 8.

The controller 18 determines these data (emission pulse control signal and multiplying coefficient)  
25 in correspondence to the value of the power prediction

signal. Specifically, the number of times of light emission and the light emission time duration are decreased, or the multiplying circuit coefficient by which the delayed picture signals is multiplied is decreased, with increasing the power prediction signal, thereby the gray scale level of a signal to be displayed in the display apparatus is decreased as compared with the gray scale level of the input picture signal. Thus, the light emission amount per unit area (luminance) in the display apparatus is adjusted so that the power to be consumed in the display apparatus is controlled.

It is also possible to adjust the light emission amount (luminance), and thereby achieve the power control, by controlling only either one of the changeover in emission type or the multiplying circuit coefficient depending on the magnitude of the power prediction signal.

As described above, in the present invention, since a power prediction signal is computed by using a coefficient representing a ratio of power consumptions necessary for data display of the individual colors, and since the power prediction signal obtained in this way is used as a parameter, the automatic power control can be achieved more accurately than in the prior art method.

Fig. 9 shows a control characteristic showing variations in the power prediction signal versus the light emission amount per unit area (luminance), where the

horizontal axis represents the magnitude of the power prediction signal and the vertical axis represents the light emission amount per unit area (luminance). The controller 18, by adjusting the emission type or the multiplying coefficient in response to the power prediction signal outputted from the adder 17, exerts its control function so that the power consumed in the display apparatus is inhibited from becoming excessively large, by lowering the light emission amount per unit area (luminance) as the power prediction signal increases.

(Embodiment 2)

A second embodiment of the present invention is described. This embodiment shows another determination of the parameter KR, KG and KB of Embodiment 1. In this embodiment, these parameter KR, KG and KB are determined based on a ratio of areas of individual color phosphors, while it is based on the power ratio in the Embodiment 1.

Fig. 10 shows examples of the phosphor arrangement of a plasma display panel. In Fig. 10A, the stripe structure has a ratio of widths of individual color phosphors,  $WR : WG : WB = 1.0 : 1.0 : 1.0$ , so that discharge areas for R, G and B are of the same. Accordingly, a ratio of powers PR, PG and PB to be consumed for data display when the individual single colors

are displayed on this panel is generally  $PR : PG : PB = 1.0 : 1.0 : 1.0$ . In such a case, the ratio of the parameters  $KR$ ,  $KG$  and  $KB$  with which the  $R$  average level, the  $G$  average level and the  $B$  average level is multiplied respectively are determined as  $KR : KG : KB = 1.0 : 1.0 : 1.0$ . The power consumption signal can be obtained by using such parameters  $KR$ ,  $KG$  and  $KB$ .

Here is discussed a case in which the widths of individual color phosphors are unbalanced with the view of improving the color temperature as shown in Fig. 10B. In Fig. 4B,  $WR : WG : WB = 1.0 : 1.0 : 1.4$ , where the width  $WB$  of the blue phosphor is broadened wider than those of the other two colors so that the color temperature of the panel is heightened. In this case, differences in phosphor width results in differences in  $R$ ,  $G$  and  $B$  discharge areas, and these differences are reflected in the consumed power for data display, with the result of a ratio of  $PR : PG : PB = 1.0 : 1.0 : 1.4$ , generally. In such a case, if the ratio of  $KR$ ,  $KG$  and  $KB$  is set as  $KR : KG : KB = 1.0 : 1.0 : 1.4$ , then the power prediction signal can still be computed correctly.

Like this, the area of a phosphor is generally proportional to the power consumed for data display. Therefore, it is also possible to compute the power prediction signal in a simplified manner by inputting a ratio of phosphor areas as  $KR$ ,  $KG$  and  $KB$  to the first multiplying

circuit 14, the second multiplying circuit 15 and the third multiplying circuit 16 of Fig. 1, respectively.

While the display apparatus with a plasma display panel (PDP) is described above, this invention may also be applied to other emission-type display apparatus such as a LED (Light Emission Diode) display apparatus, a field emission display (FED) and so on.

According to the present invention described above, the light emission amount (luminance) in the display section of the display apparatus is controlled based on a power prediction signal which is obtained by weighting individual color average levels with coefficients representing the power consumption ratio or phosphor area ratio, and then determining a sum of those weighted color average levels. Thus, there can be provided a display apparatus which can be controlled in power consumption more accurately, as compared with the prior art method in which power consumption of the display apparatus is controlled by using average luminance.

Although the present invention has been described in connection with specified embodiments thereof, many other modifications, corrections and applications are apparent to those skilled in the art. Therefore, the present invention is not limited by the disclosure provided herein but limited only to the scope of the appended claims.

## CLAIMS

1. A display apparatus comprising:

an emission unit for emitting light to display  
5 images;

integrating circuits for integrating input picture  
signals of R, G and B for a predetermined period to output  
an average level of R signal, an average level of G signal  
and an average level of B signal, respectively;

10 first, second and third multiplying circuits for  
multiplying the R average level, the G average level and  
the B average level by their respective parameters  $K_R$ ,  $K_G$   
and  $K_B$ ;

a power prediction circuit for obtaining and  
15 outputting a power prediction signal indicative of amount of  
power expected to be consumed on the emission unit by  
adding output signals from the first, second and third  
multiplying circuits together;

a controller for receiving said power prediction  
20 signal to output a control signal based on a value of the  
received signal; and

a brightness control circuit for controlling light  
emission amount of the emission unit per unit area  
according to the control signal.

2. The display apparatus according to claim 1, wherein a ratio of parameters KR, KG and KB is determined to be equal to a ratio of powers consumed for display each color of red, green and blue with same brightness.

5

3. A display apparatus comprising:  
an emission unit for emitting light to display images;

integrating circuits for integrating input picture  
10 signals of R, G and B for each predetermined period to output an average level of R signal, an average level of G signal and an average level of B signal, respectively;

first, second and third multiplying circuits for  
multiplying the R average level, the G average level and  
15 the B average level by their respective parameters KR, KG and KB, respectively, the ratio of parameters KR, KG and KB being determined to be equal to a ratio of powers consumed for display each color of red, green and blue with same brightness;

20 a power consumption prediction circuit for obtaining and outputting a power prediction signal indicative of amount of power expected to be consumed on the emission unit by adding output signals from the first, second and third multiplying circuits together;

25 a controller for receiving said power prediction

signal to output a multiplying coefficient based on a value of the received signal;

a delay circuit for delaying the input picture signals of R, G and B to output the delayed picture signals DR, DG and DB, respectively; and

fourth, fifth and sixth multiplying circuits for multiplying the delayed picture signals DR, DG and DB by the multiplying coefficient, respectively.

4. A display apparatus for dividing one field of picture signal into a plurality of subfields weighted respectively, and then displaying images of subfields in superimposition on time region to realize gradation expression, said display apparatus comprising:

an emission unit for emitting light to display images;

R integrating circuit, a G integrating circuit and a B integrating circuit for integrating at least one field of input picture signals of R, G and B to output an average level of R signal, an average level of G signal and an average level of B signal, respectively;

first, second and third multiplying circuits for multiplying the R average level signal, the G average level signal and the B average level signal by parameters KR, KG and KB determined based on the ratio of powers consumed



on the emission unit to display each color of red, green and blue;

5 a power prediction circuit for obtaining and outputting a power prediction signal indicative of amount of power expected to be consumed on the emission unit by adding output signals from the first, second and third multiplying circuits together;

10 a controller for receiving the power prediction signal to output a emission pulse control signal for selecting one of light emission types in response to a value of the received signal;

a delay circuit for delaying the input picture signals R, G and B to output the delayed picture signals DR, DG and DB, respectively;

15 a picture signal - subfield associating circuit for receiving the emission pulse control signal and the delayed picture signals DR, DG and DB, and associating output signals from the delay circuit with subfield structure of the light emission type based on the emission pulse control signal; and  
20

subfield pulse generator for receiving the emission pulse control signal, and generating pulses in the subfield structure corresponding to the light emission type based on the emission pulse control signal, the pulses  
25 including at least one of scanning pulses, sustaining pulses

and erasing pulses.

5. A display apparatus for displaying images of subfields in superimposition on time region to display data with gradation, by dividing one field of picture signal into a plurality of subfields weighted, said display apparatus comprising:

an emission unit for emitting light to display images;

10 R integrating circuit, G integrating circuit and B integrating circuit for integrating at least one field of input picture signals of R, G and B to output an R average level signal, a G average level signal and a B average level signal, respectively;

15 first, second and third multiplying circuits for multiplying the R average level signal, the G average level signal and the B average level signal by respectively parameters  $K_R$ ,  $K_G$  and  $K_B$  obtained by a ratio of powers consumed for display each color of red, green or blue;

20 a power prediction circuit for obtaining and outputting a power prediction signal indicative of power expected to be consumed on the emission unit by adding output signals from the first, second and third multiplying circuits together;

25 a controller for receiving said power prediction

signal to output a emission pulse control signal and a multiplying coefficient according to a value of the received signal, said emission pulse control signal being available for selecting one of light emission types, said multiplying  
5 coefficient being available for equalizing gray scale level at a border of adjacent emission types, said multiplying coefficient being obtained based on said power prediction signal from the controller;

a delay circuit for delaying the input picture  
10 signals of R, G and B to output delayed picture signals DR, DG and DB, respectively;

fourth, fifth and sixth multiplying circuits for multiplying the delayed picture signals DR, DG and DB by said multiplying coefficient for collecting gray scale level  
15 so as to equalize gray scale level between adjacent emission types at changeover point of those emission types, respectively;

a picture signal - subfield associating circuit for receiving the emission pulse control signal and the signals  
20 of the fourth, fifth and sixth multiplying circuits as inputs, and associating the received signals from the fourth, fifth and sixth multiplying circuits with subfield structure of a light emission type responsive to the emission pulse control signal; and

25 subfield pulse generator for receiving the

emission pulse control signal, and generating pulses including scanning, sustaining, erasing pulses with said subfield structure of the light emission type responsive to the emission pulse control signal.

5

6. The display apparatus according to claim 1, wherein a ratio of the parameters  $K_R$ ,  $K_G$  and  $K_B$  is equal to a ratio of area of phosphors for each color of red, green and blue.

Fig. 1

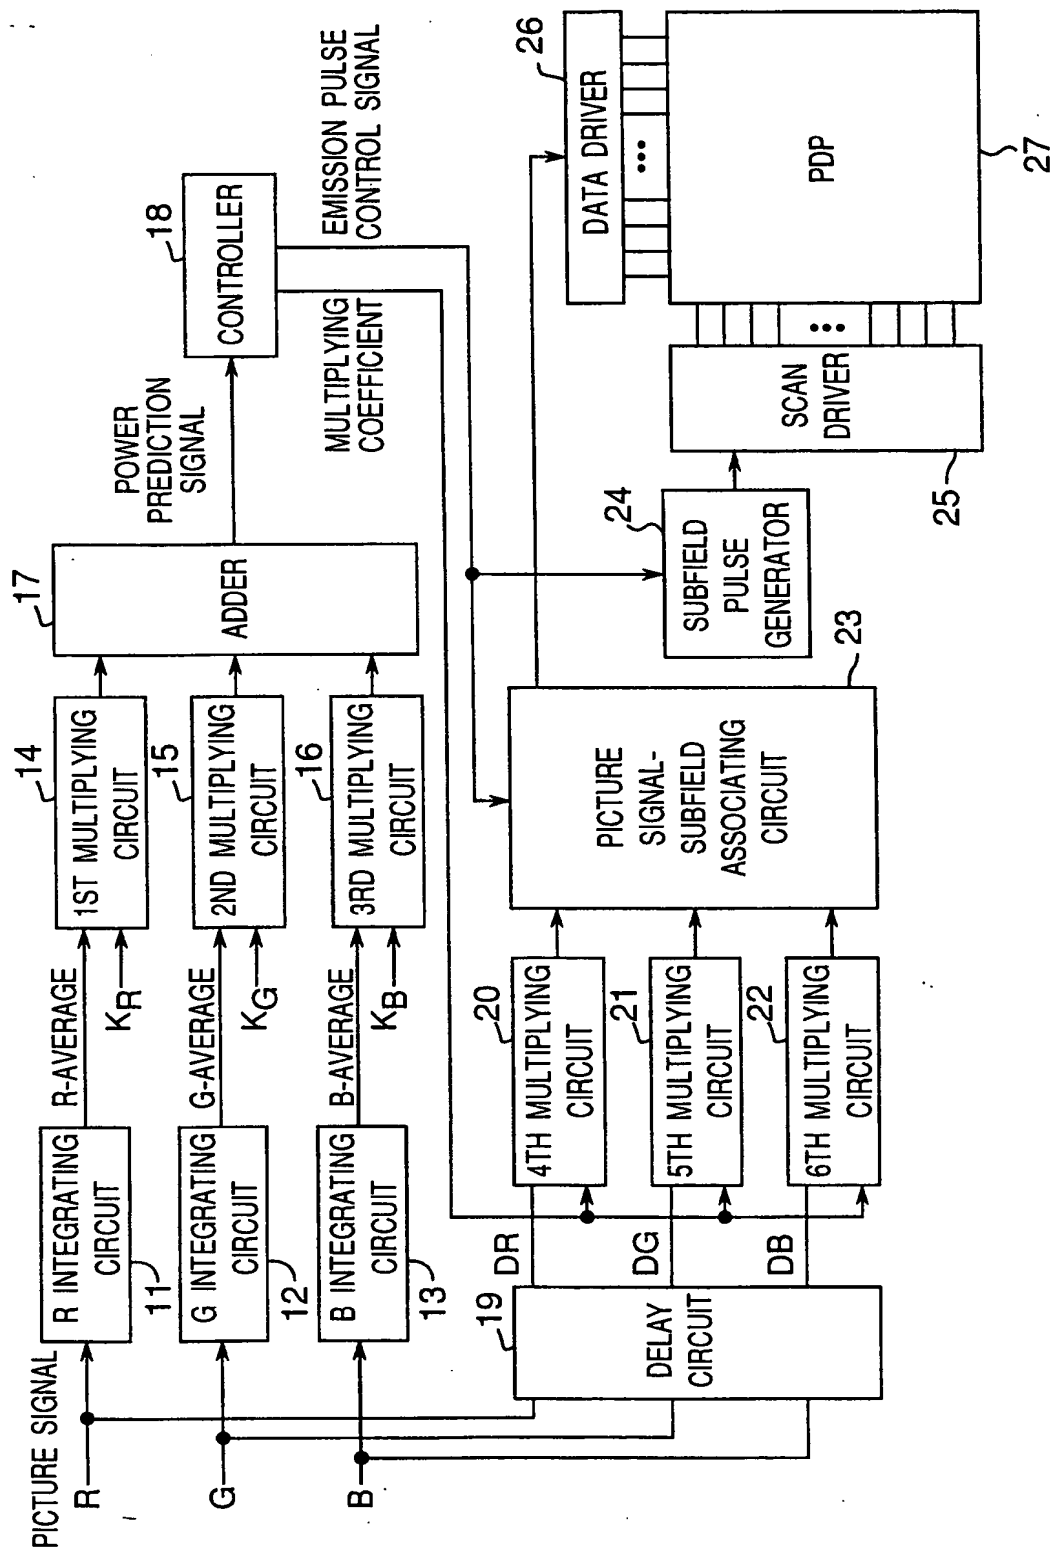


Fig.2

NUMBER OF EMISSION PULSES									
EMISSION PULSE CONTROL SIGNAL	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	TOTAL
EMISSION TYPE A	5	10	20	40	80	160	320	640	1275
EMISSION TYPE B	4	8	16	32	64	128	256	512	1020
EMISSION TYPE C	3	6	12	24	48	96	192	384	765
EMISSION TYPE D	2	4	8	16	32	64	128	256	510
EMISSION TYPE E	1	2	4	8	16	32	64	128	255

3/11

Fig.3

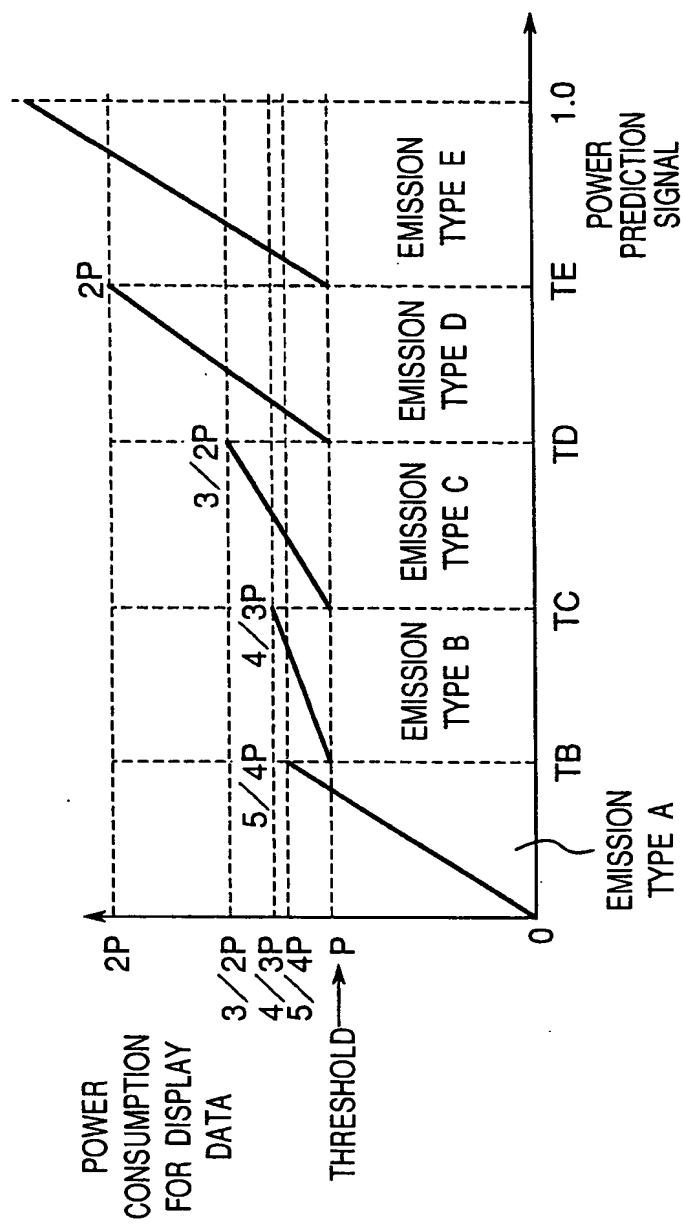


Fig.4

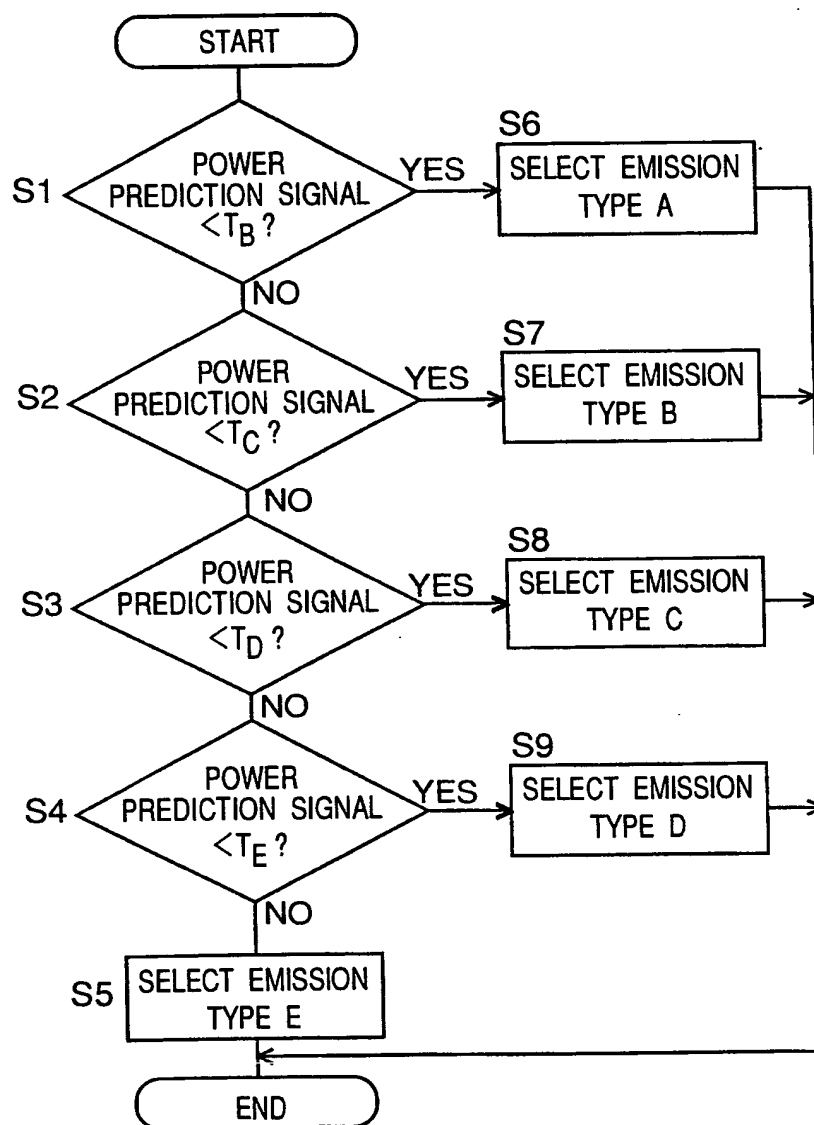




Fig.5


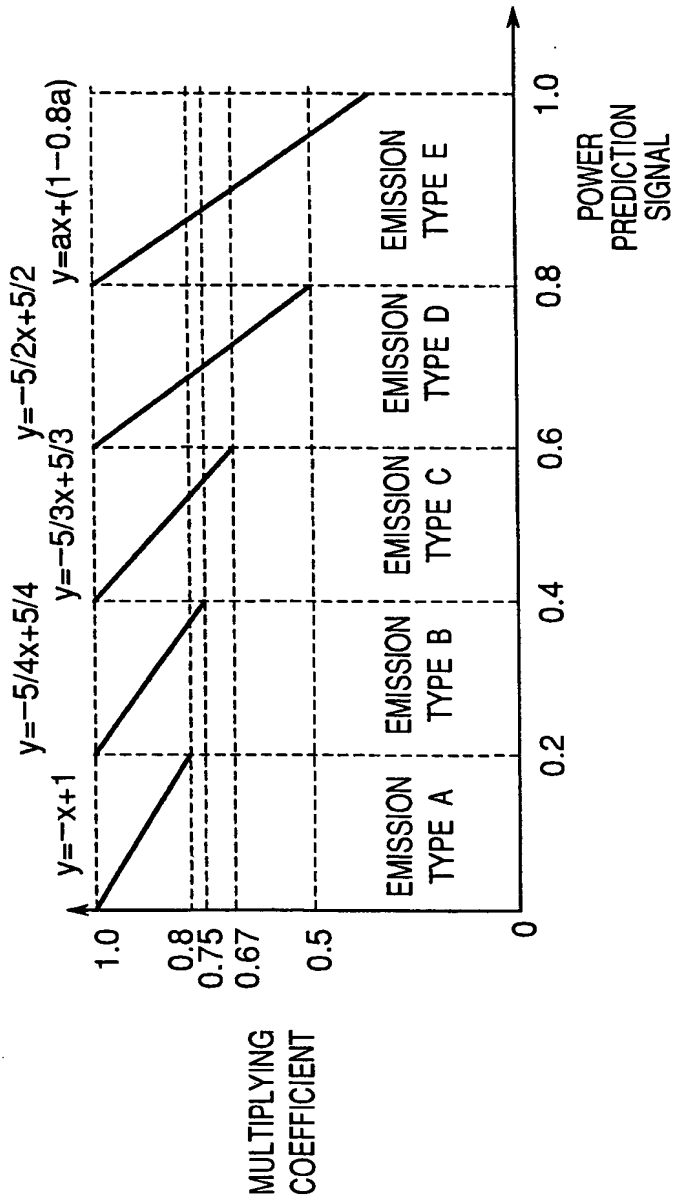


Fig.6

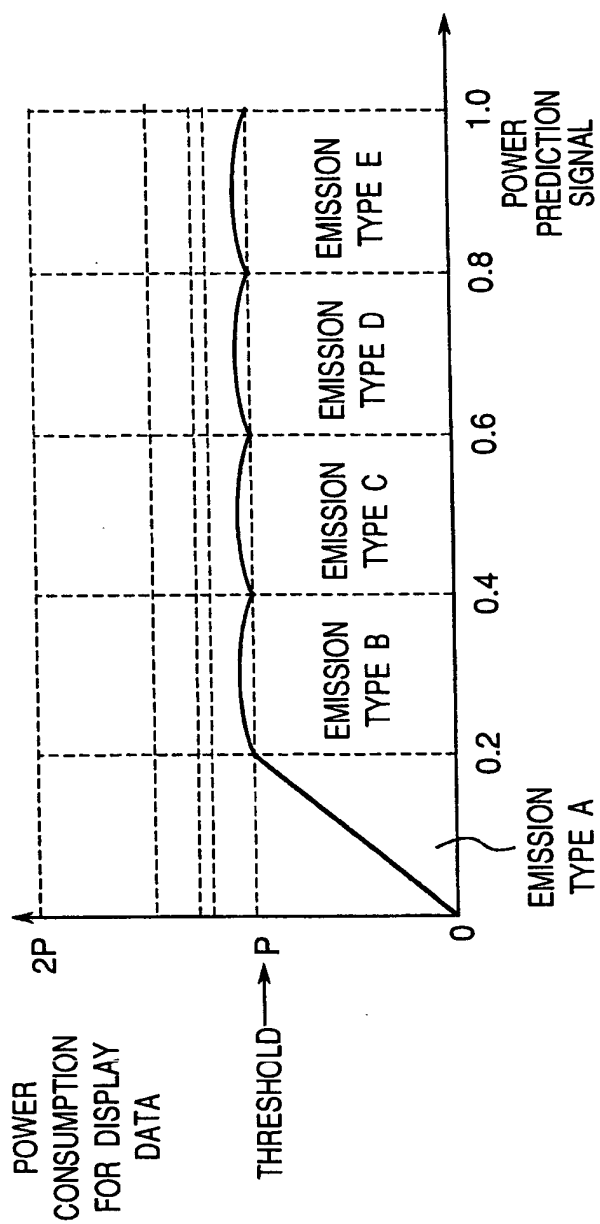

7/11

Fig.7




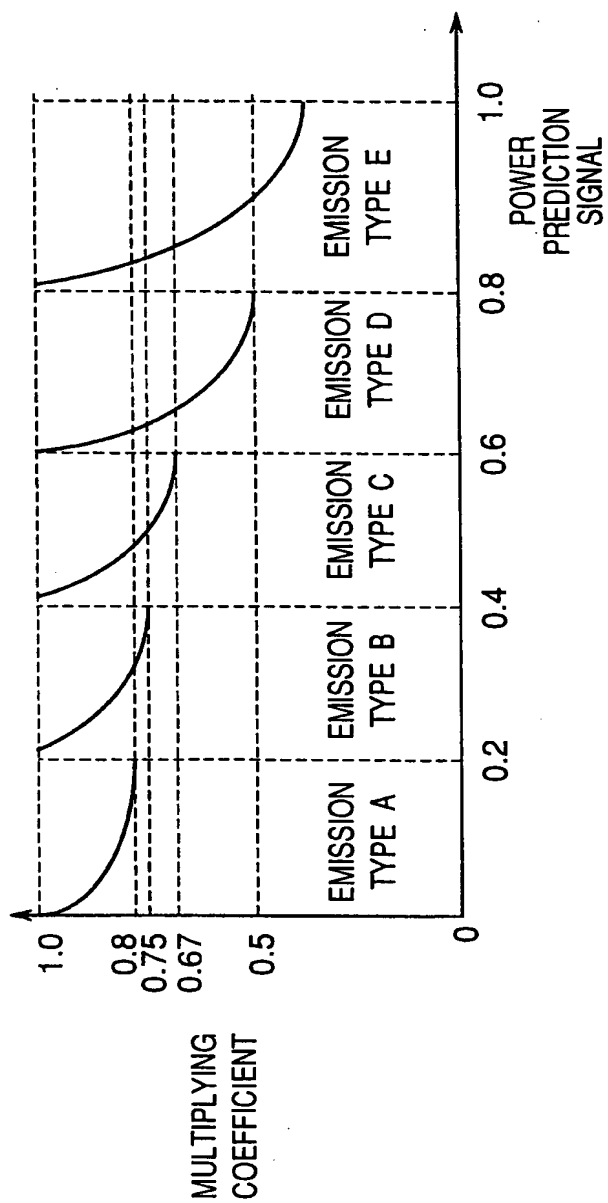


Fig.8

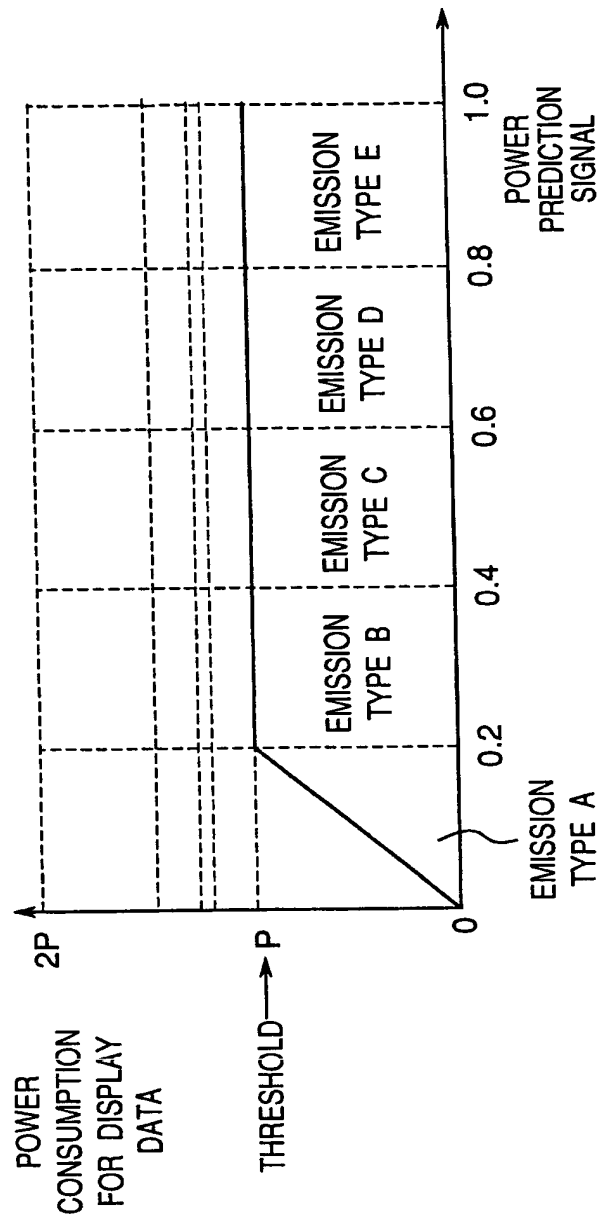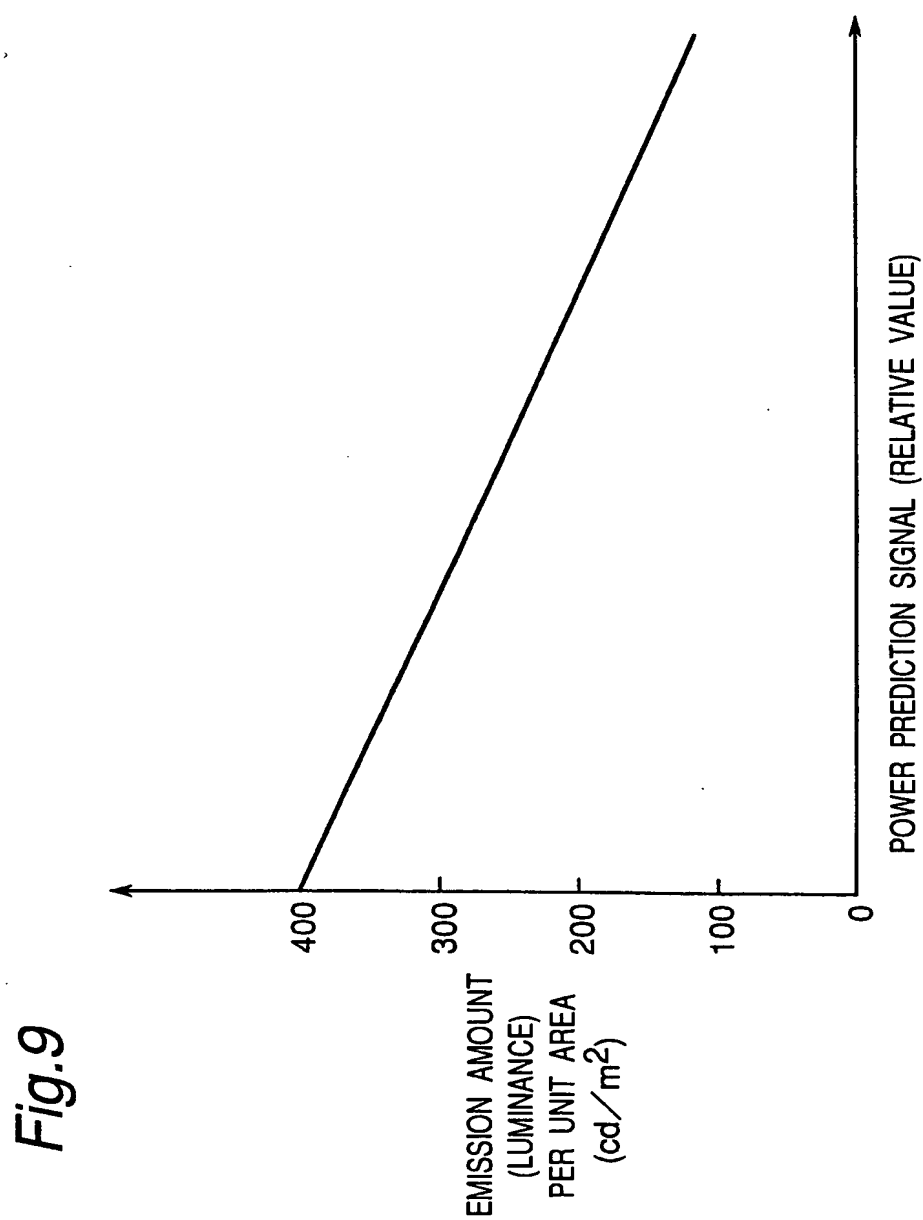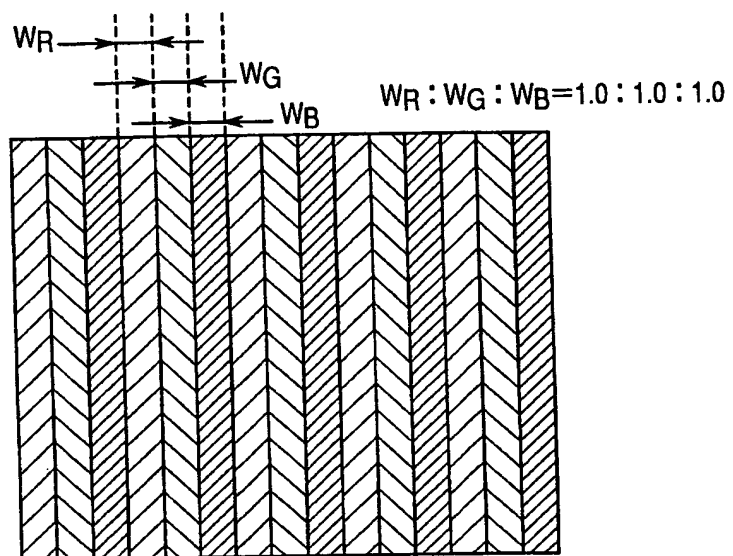

9/11



*Fig. 10A**Fig. 10B*

$$W_R : W_G : W_B = 1.0 : 1.0 : 1.4$$


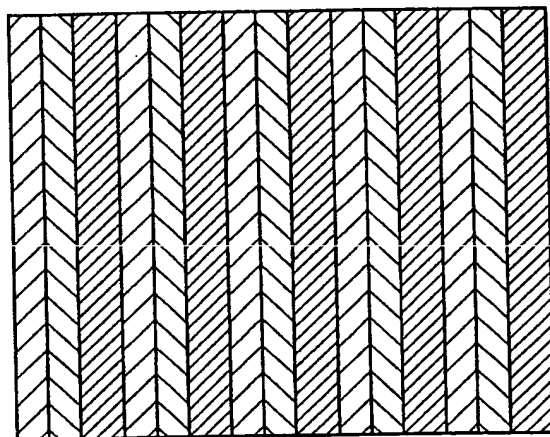


Fig.11 PRIOR ART

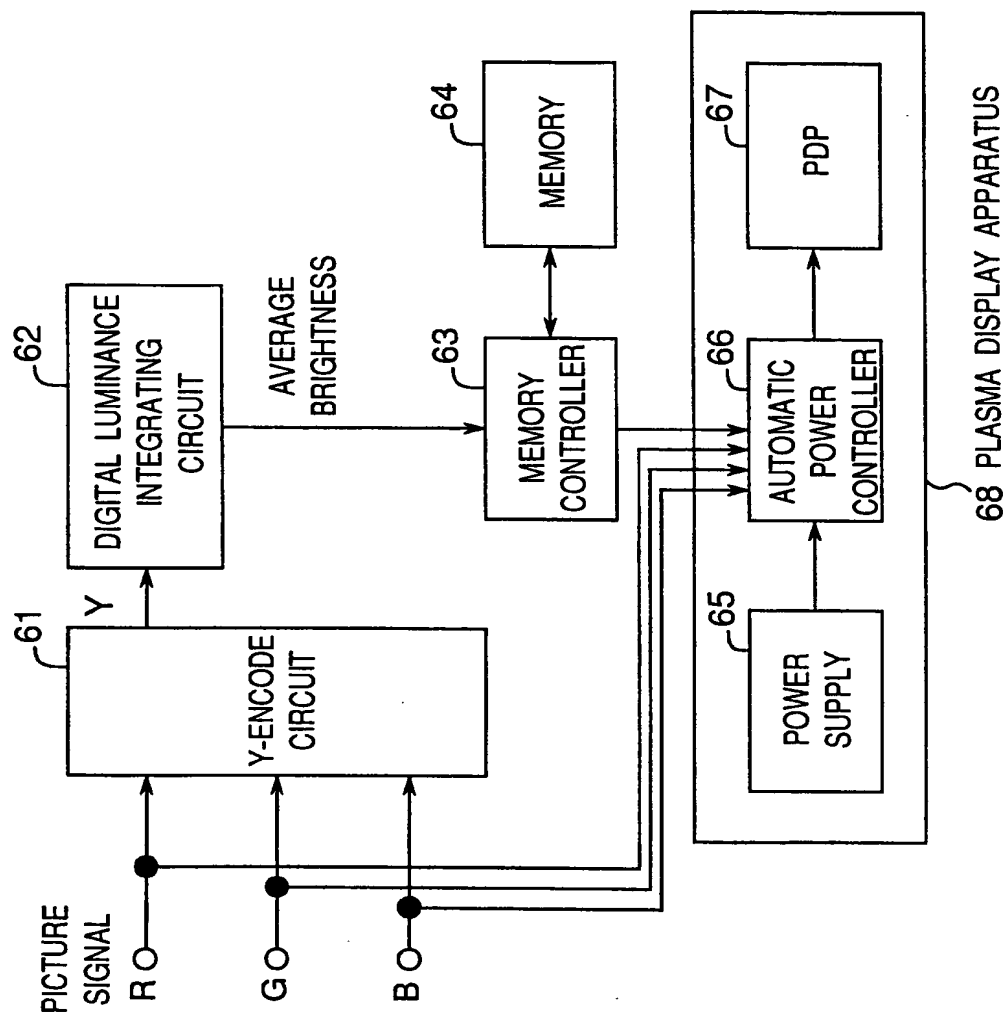

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/JP 99/05006

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G09G3/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G09G H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 745 085 A (TOMIO ET AL) 28 April 1998 (1998-04-28) abstract column 3, line 66 -column 4, line 28 column 7, line 19 -column 9, line 3; figure 1	1-6
A	US 5 303 071 A (KAKIMURA) 12 April 1994 (1994-04-12) cited in the application abstract column 2, line 46 -column 3, line 47; figure 1	1-6
A	US 5 257 096 A (OSHIMA) 26 October 1993 (1993-10-26) column 3, line 26 -column 4, line 4; figure 6	1-6
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier document but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  
"&" document member of the same patent family

Date of the actual completion of the international search

18 January 2000

Date of mailing of the international search report

26/01/2000

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

O'Reilly, D



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 99/05006

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>PATENT ABSTRACTS OF JAPAN  vol. 1996, no. 7,  31 July 1994 (1994-07-31)  &amp; JP 08 065607 A (FUJITSU GENERAL LTD.),  8 March 1996 (1996-03-08)  cited in the application  abstract</p> <p>-----</p>	1-6

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 99/05006

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5745085 63 A		NONE	
US 5303071 A	12-04-1994	DE 69123233 D	02-01-1997
		DE 69123233 T	13-03-1997
		EP 0493078 A	01-07-1992
		JP 5091311 A	09-04-1993
		KR 9409719 B	17-10-1994
US 5257096 A	26-10-1993	JP 4072990 A	06-03-1992
JP 08065607 A	08-03-1996	NONE	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**